


# Recommended DSP Crossover Settings - for active application

## „SV 4009“

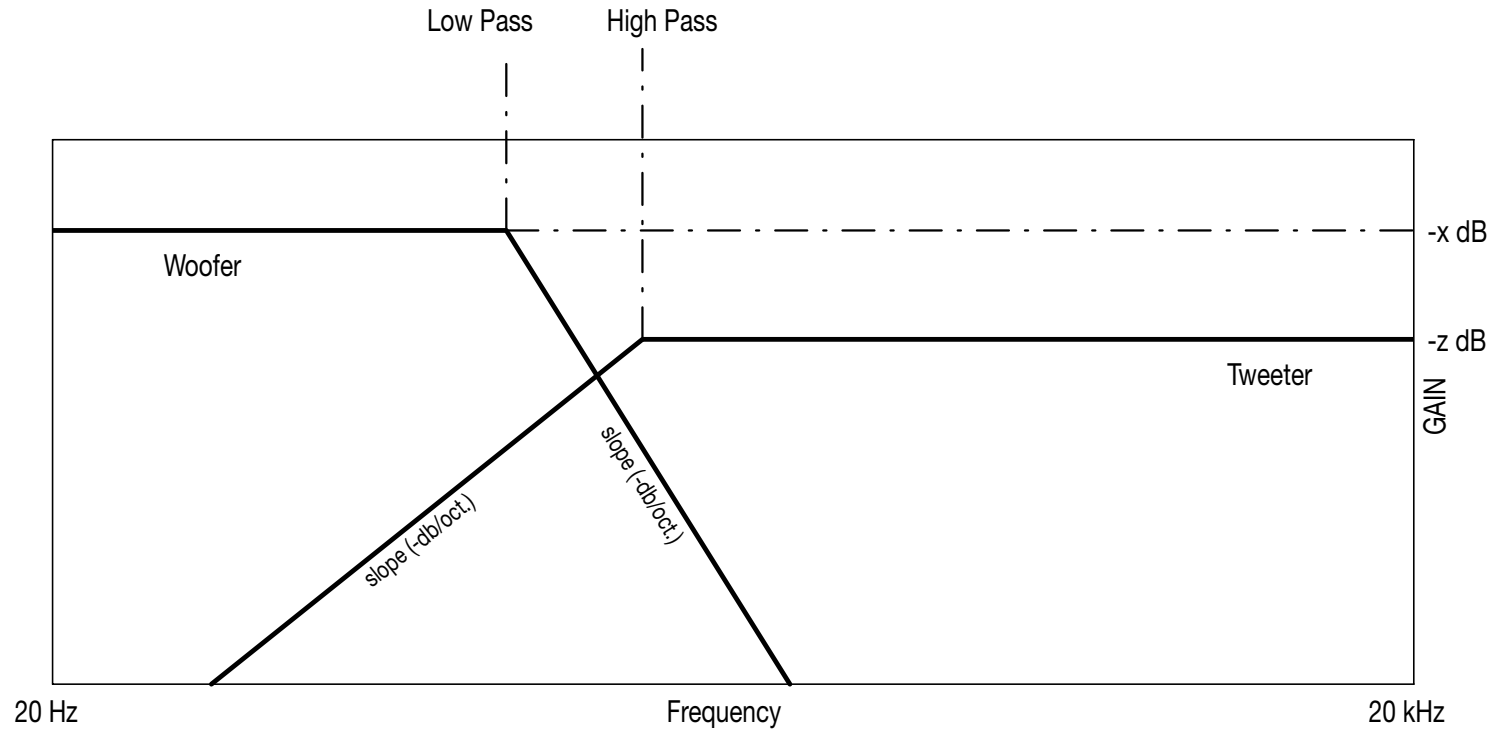

Q = 0.5 Typical Linkwitz-Riley  
 Q = 0.7 Typical Butterworth  
 Q = 1.0 Typical Tschebyscheff

	Woofer					Tweeter					
	Low Pass (Hz)	Q	Slope (-dB/oct.)	Gain (dB)	Phase (degree)	High Pass (Hz)		Q	Slope (-dB/oct.)	Gain (dB)	Phase (degree)
						A	B				
<b>SV 4009</b>	2.500	0,7	12	0	0	5.500	4.000	0,7	12	-7	0

A = recommended frequency point B = lowest usable frequency point